
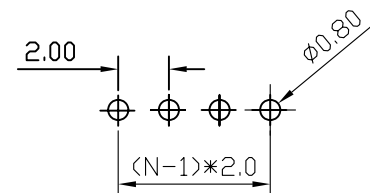

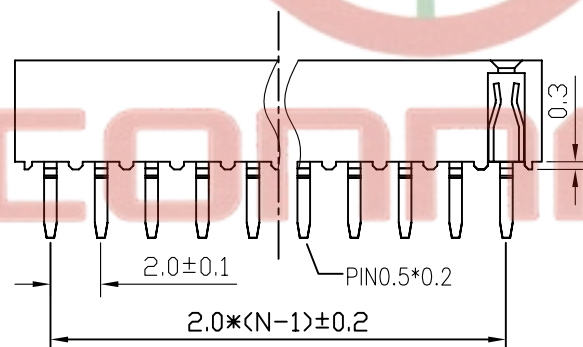


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/22/05'		

N:NUMBER OF CONTACTS

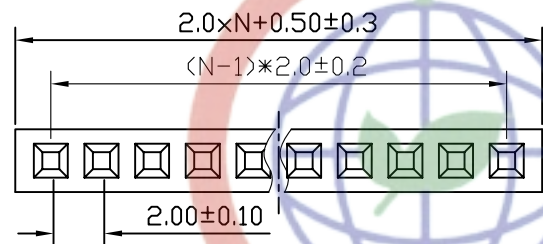

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.
- PART NUMBER: DS1026-01
- PRODUCT NUMBER CODE:

DS1026-01 - X X X X X

CONTACTS TYPE
V:VERTICAL TYPE
HOUSING COLOR
B:BLACK
CONTACT PLATING
8: FULL GOLD FLASH
CONNECTOR TYPE
S:SOCKET
No.OF CONTACTS
1*1-1*X
SERIES No.
DS1026-01

Tel:86-574-63508787

Fax:86-574-63510817

E-mail:sale@zhenqin.com.cn

Http://www.connfly.com

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	UNIT	TITLE	FEMALE HEADER PITCH 2.0mm TYPE	
X.	±0.60	X.	±5°	mm				
.X	±0.38	.X	±3°	A4				
.XX	±0.25	.XX	±2°					
DRAWING TYPE	CUSTOMER			SHEET SIZE				
SCALE	1:1	SHEET	1 OF 1	SERIES				
DRAWING NO.	C-DS1026-01-XXXXX			DS1026-01 SERIES				



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD